


LogiLink®

USB 3.2 Gen 2 PCI-E Card, 2 Ports


Art. No.: PC0080

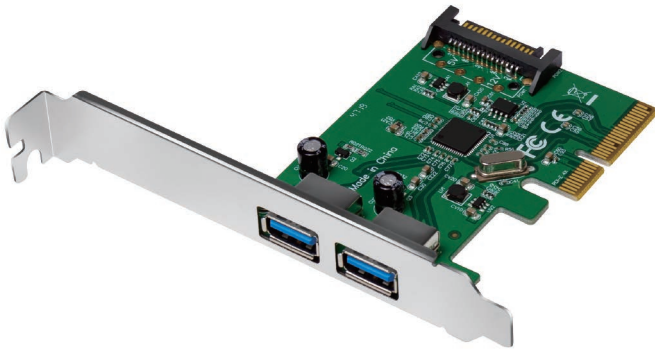

Supports the USB 3.2 Gen 2 standard with a transfer rate of up to 10 Gbps.

Features:

- » Chipset: ASM3142
- » Compliant with USB 3.2 Gen 2 specification
- » Up to 10 Gbps bandwidth performance with low latency
- » Backward compatible with USB 3.0/2.0/1.1/1.0 devices
- » Bridge PCI Express to USB 3.2
- » Support 2 ports USB 3.2 type A connector, 5 V/1,5 A (7,5 W) per port
- » Hot Plug and Plug & Play
- » Supports Window 7/8/10/11, Mac OS, Linux, Android & Chrome OS
- » Supports PCI Express Link power management
- » Compliant with PCI Express Base 3.0 Specification
- » Compliant with Universal Serial Bus 3.1 Specification Revision 1.0
- » Compliant with PCI Bus Power Management Interface Specification Revision 1.2
- » Compliant with xHCI (eXtensible Host Controller Interface) specification Revision 1.1
- » Compliant with UASAP (USB attached SCSI Protocol) Revision 1.0
- » Supports USB3.1 and USB2.0 Link Power Management
- » Supports Control, Bulk, Stream, Interrupt, Isochronous transfer type
- » Supports independent port power control
- » Supports over-current detection
- » Supports Remote/Wakeup event
- » Backward compatible with Legacy USB function and device

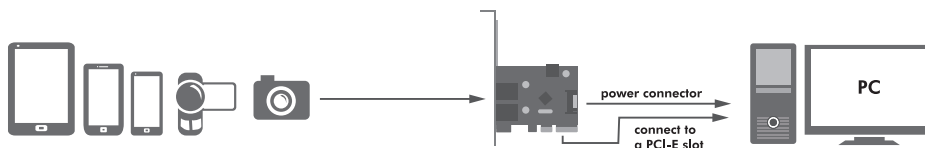

Please download the driver online at: <http://downloads.2direct.de/treiber/PC0080.zip>




Low Profile Bracket included



*The specifications and pictures are subject to change without prior notice.
*All trade names referenced are the registered trademarks of their respective owners.



LogiLink®

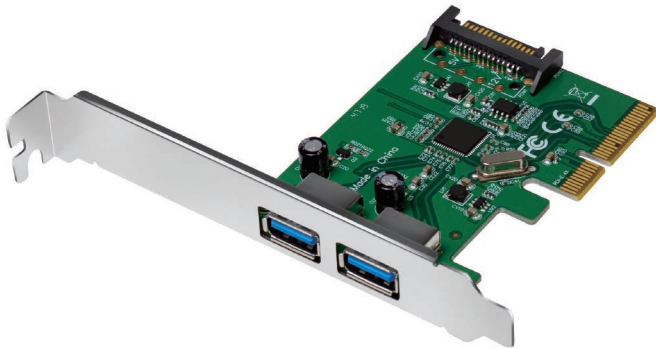

USB 3.2 Gen 2 PCI-E Card, 2 Ports

Art. No.: PC0080

Specifications:

Chipset	ASM3142
USB Version	USB 3.2 Gen 2
Connector	2x USB-A Female
Power By	SATA 15Pin
Backwards Compatible	USB 3.0, USB 2.0, USB 1.1 & USB 1.0
USB-A Power Output	5 V/1,5 A (7,5 W) per port
Transfer Rate	Up to 10 Gbps
Hot Plug and Plug & Play	Yes
Power Consumption (max.)	1,3 W
Standby Power Consumption	1,3 W
Compatible Operating Systems	Windows 7/8/8.1/10/11, MacOS, Linux, Android, & Chrome OS
Operating Temperature	0–45 °C
Operating Humidity	10–85% RH (no condensation)
Storage Temperature	-10–70 °C
Storage Humidity	5–90% RH (no condensation)
Dimensions	12x8,01x2,18 cm
Weight	60 g

Package Contents:

- » 1x USB 3.2 Gen 2 PCI-Express Card
- » 1x Low Profile Bracket
- » 1x User Manual

Package Information:

- » Packing Dimension: 175x140x38 mm
- » Packing Weight: 0,12 kg
- » Carton Dimension: 455x320x295 mm
- » Carton Q'ty: 50 pcs
- » Carton Weight: 6,39 kg



*The specifications and pictures are subject to change without prior notice.
*All trade names referenced are the registered trademarks of their respective owners.

