

DEVELOPED  
IN GERMANY

be quiet!®



## SYSTEM POWER 10

PROVEN RELIABILITY, QUIET OPERATION

850W • 750W • 650W • 550W • 450W

### IDEAL APPLICATIONS

Office application  
Entry-level gaming systems  
Multimedia and home theater systems

### HIGHLIGHTS

80 PLUS® Gold and Bronze efficiency  
850W model with LLC + SR + DC-to-DC  
Quiet operation  
5-year manufacturer's warranty

#### Proven Reliability, Quiet Operation

System Power 10 is the PSU of choice for price-conscious PC builders that do not want to dispense on reliability and quietness.

#### Highlights

- Rock-solid stability with up to 2 strong 12V-rails
- DC-to-DC technology for tight voltage regulation
- Up to 4 PCIe connectors for powerful GPUs
- Silence-optimized and temperature-controlled 120mm quality fan reduces system noise
- Stand-by drain of less than 0.15 watts
- 80 PLUS® Gold and Bronze efficiency (up to 93.4%)
- Attractive black sleeved cable
- Complete suite of top safety features
- 5-year manufacturer's warranty
- Product conception, design and quality control in Germany



# SYSTEM POWER 10

PROVEN RELIABILITY, QUIET OPERATION

Technical Data						
IN GENERAL	Model	850W	750W	650W	550W	450W
	Article no.	BN330	BN329	BN328	BN327	BN326
	EAN code	4260052189108	4260052189092	4260052189085	4260052189078	4260052189061
	Voltage (Vac) / Frequency (Hz)	200-240 / 50				
	Dimensions (L x W x H)	160 x 150 x 86	140 x 150 x 86			
	ATX12V 2.52 / EPS12V 2.92	✓ / ✓				
	Fan type   fan size (mm)	silence-optimized be quiet! fan   120	temperature-controlled quality fan   120			
	Noise level (dB(A)) at 20 / 50 / 100% load	10.3 / 10.4 / 30.7	8.9 / 13.3 / 34.7	8.9 / 11.2 / 30.7	8.6 / 9.4 / 25.7	8.7 / 9.8 / 19.2
	12V rail (Multi-Rail) / 12V Single Rail	2 / -	- / 1			
	Overclocking Key / Jumper	- / -				
	Power Good signal	100-150ms				
	PFC	active				
	Certifications / Efficiency (%) at 230V	80 PLUS® Gold / 93.4%	80 PLUS® Bronze / 89.1%	80 PLUS® Bronze / 88.5%	80 PLUS® Bronze / 89.1%	80 PLUS® Bronze / 88.5%
	Energy Star 8.0 compatible	✓				
	ErP 2014 ready / Power in stand-by (W)	✓ / <0.15				
	OCP, OVP, UVP, SCP, OPP, OTP	✓				
Lifetime of PSU at 25°C (h)	>100,000					
CABLES	No. of cables	7		6	5	
	Maximum cable length (cm)	81		79		
	Length of ATX-connection cable (cm)	55				
	Modular cable management	-				
	Sleeved cables	20+4-Pin				
	Flat cables	P4+4, P8, PCIe, drives		P4+4, P4, PCIe, drives		P4+4, PCIe, drives
CONNECTORS	ATX-motherboard (20+4-pin)	✓				
	PCI-express (6+2-pin)	4		2		
	P8/P4 connector	1x P4+4, 1x P8		1x P4+4, 1x P4		1x P4+4
	S-ATA	6		5		
	P-ATA	1				
	Easy-plug HDD connectors	-				
	FDD (Floppy)	-				

## Output Data


SYSTEM POWER 10 850W	AC Input	200-240Vac 50Hz 5A					
	DC Output	3.3V	5V	12V1	12V2	-12V	5VSB
	Max. Current	22A	22A	40A	36A	0.3A	3A
	Max. Combined Power	120W		849.6W		3.6W	15W
850W							
SYSTEM POWER 10 750W	AC Input	200-240Vac 50Hz 5A					
	DC Output	3.3V	5V	12V	-12V	5VSB	
	Max. Current	20A	20A	62.5A	0.3A	3A	
	Max. Combined Power	130W		750W	3.6W	15W	
750W							
SYSTEM POWER 10 650W	AC Input	200-240Vac 50Hz 5A					
	DC Output	3.3V	5V	12V	-12V	5VSB	
	Max. Current	20A	20A	54.17A	0.3A	3A	
	Max. Combined Power	120W		650W	3.6W	15W	
650W							
SYSTEM POWER 10 550W	AC Input	200-240Vac 50Hz 4A					
	DC Output	3.3V	5V	12V	-12V	5VSB	
	Max. Current	20A	20A	45.83A	0.3A	3A	
	Max. Combined Power	120W		550W	3.6W	15W	
550W							
SYSTEM POWER 10 450W	AC Input	200-240Vac 50Hz 4A					
	DC Output	3.3V	5V	12V	-12V	5VSB	
	Max. Current	20A	20A	37.5A	0.3A	3A	
	Max. Combined Power	110W		450W	3.6W	15W	
450W							

# SYSTEM POWER 10


PROVEN RELIABILITY, QUIET OPERATION

Cables


850W  
750W

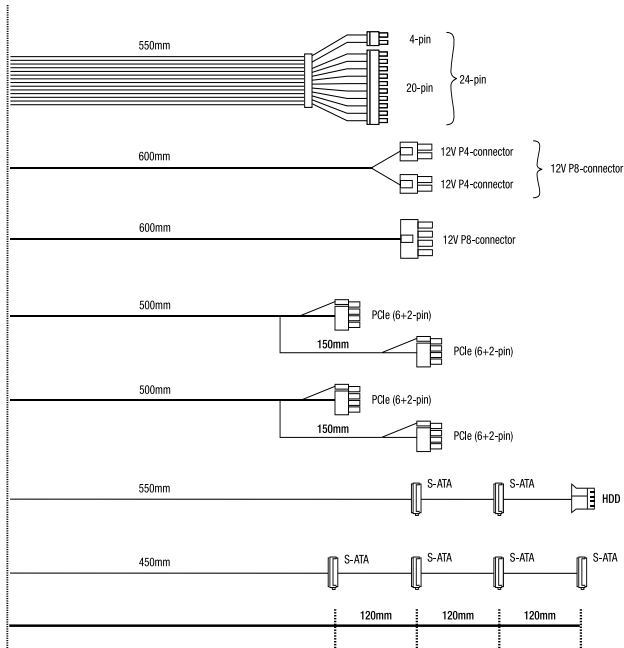


650W

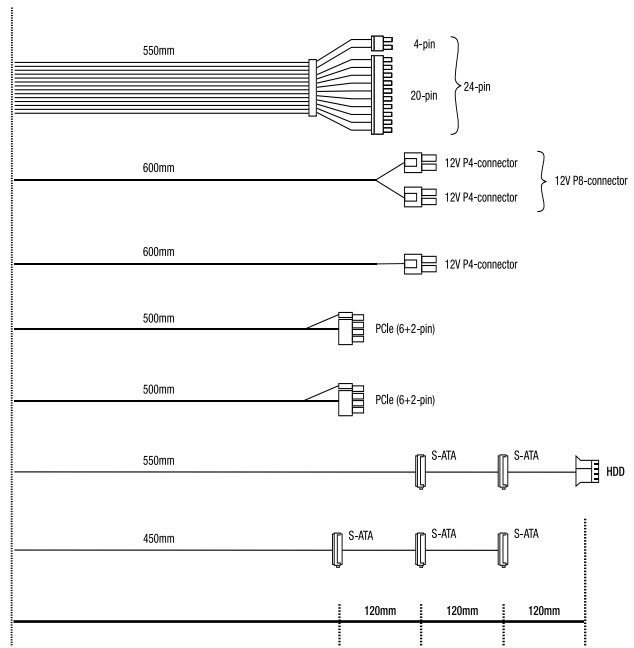

550W

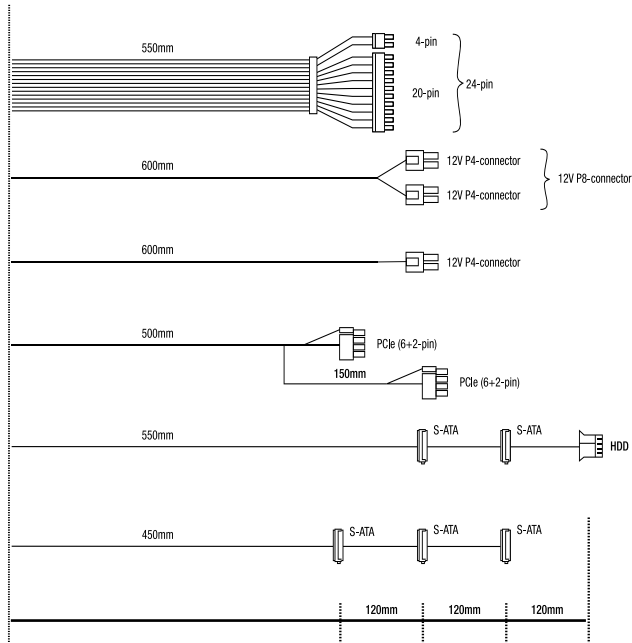

450W

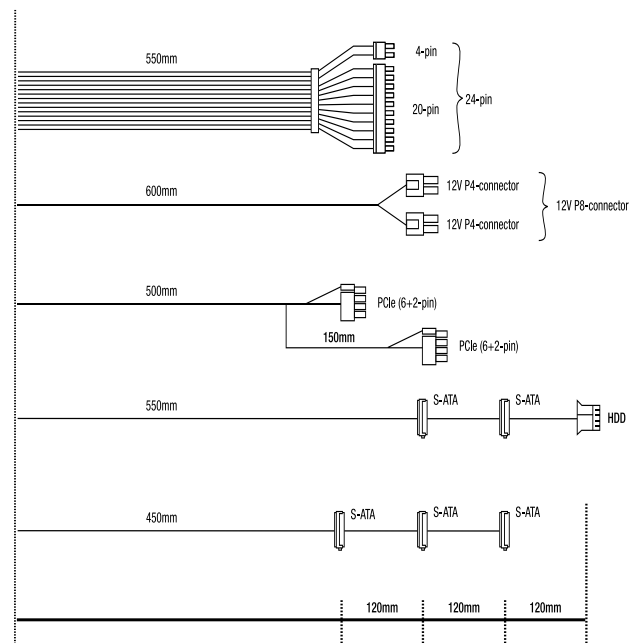

# SYSTEM POWER 10

PROVEN RELIABILITY, QUIET OPERATION

Logistics data			
Region	Model	Article no.	EAN code
EU	System Power 10 850W	BN330	4260052189108
EU	System Power 10 750W	BN329	4260052189092
EU	System Power 10 650W	BN328	4260052189085
EU	System Power 10 550W	BN327	4260052189078
EU	System Power 10 450W	BN326	4260052189061

Certifications				
	Type Approved Safety Regular Production Surveillance  www.tuv.com ID 000025878			
				

UK Authorised Representative (for authorities only)  
ProductIP (UK) Ltd, Northumberland Av.  
London WC2N 5BY

Contact	
be quiet! Headquarters Listan GmbH Wilhelm-Bergner-Straße 11c 21509 Glinde Germany	Service hotline: +49 40 7367 686 44 e-mail: <a href="mailto:service@bequiet.com">service@bequiet.com</a>  Visit the contact section on <a href="http://bequiet.com">bequiet.com</a> for the right regional service information.