





One-sectioned Wall-mounted Cabinet

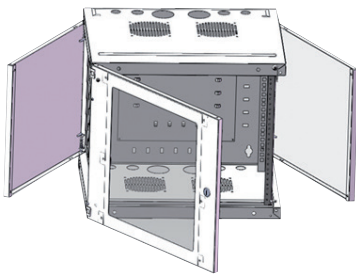

Technical Features

Material:	1.2 mm steel
Maximum Static Load:	Up to 70 kg
Finish:	Electrostatic powder paint
Color:	RAL 7035 lightgrey or RAL 9005 black

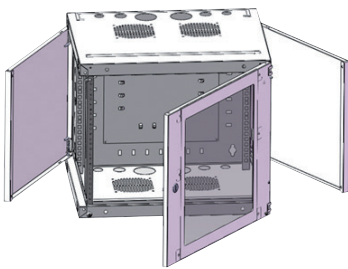

Standard Configuration

- Steel frame
- Glass door with cylindrical lock
- Openable side panels
- 1 Pair of 19" mounting rails
- UL and Gost-R certified



RoHS
compliant





* The specifications and pictures are subject to change without notice.
*All trade names referenced are the registered namework of their respective owners.

One-sectioned Wall-mounted Cabinet - RAL 9005 Black

Height U	Outer Width (W) mm	Outer Depth (D) mm	Outer Height (H) mm	Inner Height (h1) mm	Inner Width (w1) mm	Inner Depth (d1) mm	19" Rails Adjustable Depth Range (c) mm	Weight kg	Part No.	EAN Code
6U	600	450	366	266	510	410	110-305	21.36	W06E64B	8698800000522
6U	600	560	366	266	510	520	110-465	24.26	W06E66B	8698800000546
9U	600	450	488	408	510	410	110-305	24.62	W09E64B	8698800000560
9U	600	560	488	408	510	520	110-465	27.82	W09E66B	8698800000586
12U	600	450	621	541	510	410	110-305	28.01	W12E64B	8698800000607
12U	600	560	621	541	510	520	110-465	31.65	W12E66B	8698800000621
15U	600	450	755	674	510	410	110-305	31.40	W15E64B	8698800000645
15U	600	560	755	674	510	520	110-465	35.49	W15E66B	8698800000669
18U	600	450	888	808	510	410	110-305	34.81	W18E64B	8698800000683
18U	600	560	888	808	510	520	110-465	39.33	W18E66B	8698800000706
21U	600	450	1022	942	510	410	110-305	38.20	W21E64B	8698800000720
21U	600	560	1022	942	510	520	110-465	43.16	W21E66B	8698800000744

One-sectioned Wall-mounted Cabinet - RAL 7035 Light Grey

Height U	Outer Width (W) mm	Outer Depth (D) mm	Outer Height (H) mm	Inner Height (h1) mm	Inner Width (w1) mm	Inner Depth (d1) mm	19" Rails Adjustable Depth Range (c) mm	Weight kg	Part No.	EAN Code
6U	600	450	366	266	510	410	110-305	21.36	W06E64G	8698800000515
6U	600	560	366	266	510	520	110-465	24.26	W06E66G	8698800000539
9U	600	450	488	408	510	410	110-305	24.62	W09E64G	8698800000553
9U	600	560	488	408	510	520	110-465	27.82	W09E66G	8698800000577
12U	600	450	621	541	510	410	110-305	28.01	W12E64G	8698800000591
12U	600	560	621	541	510	520	110-465	31.65	W12E66G	8698800000614
15U	600	450	755	674	510	410	110-305	31.40	W15E64G	8698800000638
15U	600	560	755	674	510	520	110-465	35.49	W15E66G	8698800000652
18U	600	450	888	808	510	410	110-305	34.81	W18E64G	8698800000676
18U	600	560	888	808	510	520	110-465	39.33	W18E66G	8698800000690
21U	600	450	1022	942	510	410	110-305	38.20	W21E64G	8698800000713
21U	600	560	1022	942	510	520	110-465	43.16	W21E66G	8698800000737

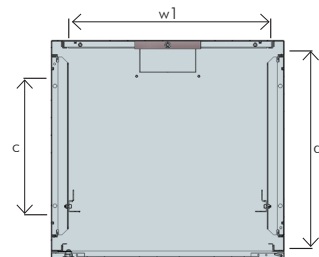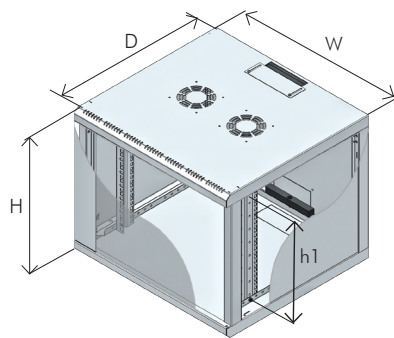

* The specifications and pictures are subject to change without notice.
 *All trade names referenced are the registered trademark of their respective owners.