


LogiLink®

PCI Express Card 2 Serial Ports



Art. No.: PC0031

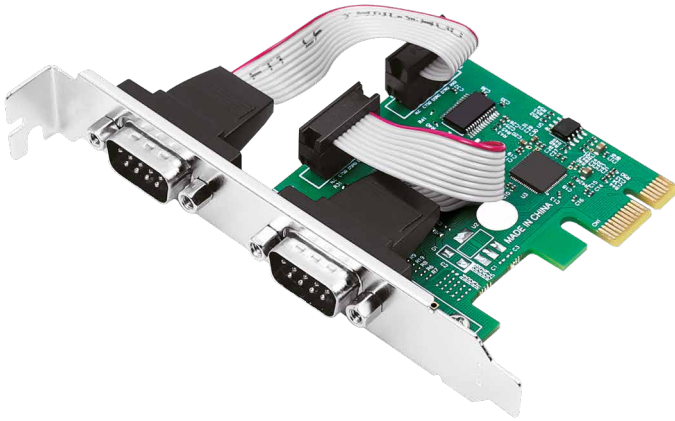

LogiLink PCI Express Card extends your PC by two serial ports to connect RS232 compatible devices. The internal and external connections are standardized and work in any PC.

Features:

- » 2x RS232 9-pin extension ports to your computer
- » Compliant with PCI Express 2.0
- » Compliant with PCI Power Management 1.2
- » With 256-byte Transmit/Receive FIFO, Single-lane (x1) PCI-Express
- » Supports hardware and software flow control
- » Supports Slow IrDA mode (up to 115200 bps) on all serial ports
- » Supports remote wakeup and power management features
- » Compatible with industrial standard 16C450/16C550 UART
- » Supports Windows, Linux and DOS

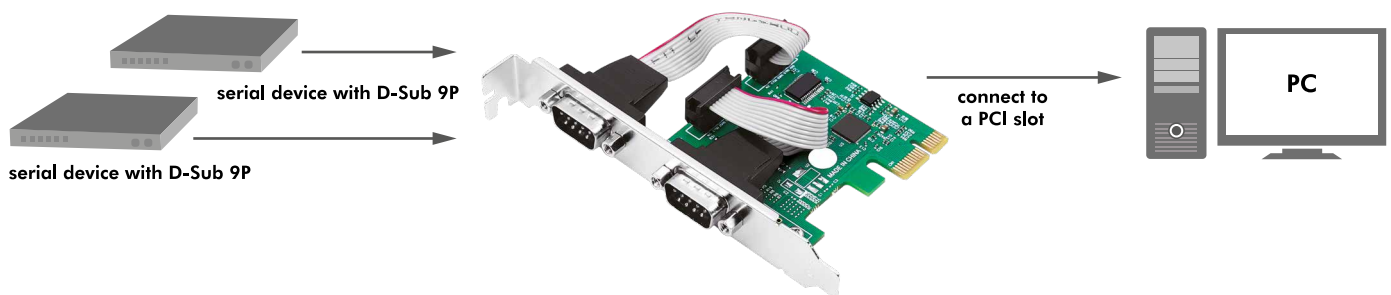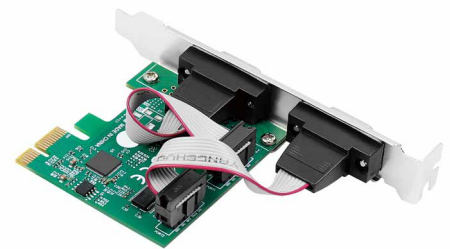

Download the driver online if required: <http://downloads.2direct.de/treiber/PC0031.zip>



*The specifications and pictures are subject to change without prior notice.
*All trade names referenced are the registered trademarks of their respective owners.



Specifications:

Chipset	ASIX AX99100
Output Ports	2 x DB9 female (serial)
Interface (Bus) Type	1 x PCI Express
PCI-Express Revision	2.0
Max. Data Transfer Rate	115200 bps
Transmit-Receive FIFO	256 byte
RS232 Flow Control	Hardware/Software flow control
Physical PCI Express link	Single-lane (x1)
Power Management	1.2
Remote Wakeup	Yes
Compability	Windows, Linux and Dos
Operating Temperature	0–70°C
Operating Humidity	0–90% RH (non-condensing)
Dimensions	7.94 x 11.97 x 2.18 cm
Weight	47.2 g

Package Contents:

- » 1 x 2 Serial Ports PCI Express Card
- » 2 x Low Profile Brackets
- » 1 x User Manual

Package Information:

- » Packing Dimension: 175 x 140 x 37 mm
- » Packing Weight: 0.12 kg
- » Carton Dimension: 490 x 380 x 345 mm
- » Carton Q'ty: 50 pcs
- » Carton Weight: 6.9 kg



*The specifications and pictures are subject to change without prior notice.
*All trade names referenced are the registered trademarks of their respective owners.

